

# Towards Quantum Advantage in Financial Market Risk using Quantum Gradient Algorithms

Nikitas Stamatopoulos,<sup>1</sup> Guglielmo Mazzola,<sup>2</sup> Stefan Woerner,<sup>2</sup> and William J. Zeng<sup>1</sup>

<sup>1</sup>Goldman, Sachs & Co., New York, NY

<sup>2</sup>IBM Quantum, IBM Research – Zurich

(Dated: November 25, 2021)

We introduce a quantum algorithm to compute the market risk of financial derivatives. Previous work has shown that quantum amplitude estimation can accelerate derivative pricing quadratically in the target error and we extend this to a quadratic error scaling advantage in market risk computation. We show that employing quantum gradient estimation algorithms can deliver a further quadratic advantage in the number of the associated market sensitivities, usually called *greeks*. By numerically simulating the quantum gradient estimation algorithms on financial derivatives of practical interest, we demonstrate that not only can we successfully estimate the greeks in the examples studied, but that the resource requirements can be significantly lower in practice than what is expected by theoretical complexity bounds. This additional advantage in the computation of financial market risk lowers the estimated logical clock rate required for financial quantum advantage from Chakrabarti et al. [Quantum 5, 463 (2021)] by a factor of 50, from 50MHz to 1MHz, even for a modest number of greeks by industry standards (four). Moreover, we show that if we have access to enough resources, the quantum algorithm can be parallelized across 30 QPUs for the same overall runtime as the serial execution if the logical clock rate of each device is  $\sim 30\text{kHz}$ , same order of magnitude as the best current estimates of feasible target clock rates of around 10kHz. Throughout this work, we summarize and compare several different combinations of quantum and classical approaches that could be used for computing the market risk of financial derivatives.

## I. INTRODUCTION

Recently, quantum algorithms have been proposed to accelerate the pricing and risk analysis of financial derivatives [1–5]. These algorithms use quantum amplitude estimation to achieve quadratic advantage compared to the classical Monte Carlo methods that are used in practice for most computationally expensive pricing. Let  $\epsilon_p$  be the error in pricing. The quantum advantage stems from the runtime of a classical Monte Carlo simulation scaling as  $\mathcal{O}(1/\epsilon_p^2)$ , while the quantum algorithms have scaling  $\mathcal{O}(1/\epsilon_p)$  [6].

A related and important financial application is the computation of the sensitivity of derivative prices to model and market parameters. This amounts to computing gradients of the derivative price with respect to input parameters. A primary business use of calculating these gradients is to enable hedging of the market risk that arises from exposure to derivative contracts. Hedging this risk is of critical importance to financial firms [7]. In some cases, gradients can be computed analytically, e.g. when the derivative price has an analytical form. In this work, we consider computing gradients where there is not a closed form for the price and where the classical comparison is to Monte Carlo simulation. Gradients of financial derivatives are typically called *greeks*, as these quantities are commonly labeled using Greek alphabet letters. For  $k$  greeks, i.e. for a  $k$ -dimensional gradient, *classical finite difference* methods compute the price at multiple points in each parameter dimension for a scaling of  $\mathcal{O}(k/\epsilon_p^2)$ .

One approach to quantum acceleration of greek computation is to construct a finite difference approximation of the financial derivative's price on a quantum computer and perform amplitude estimation on that quantity instead of its price. In Sec. IID we show that this approach, called the *semi-classical* method in [8], scales as  $\mathcal{O}(k/\epsilon)$ , where  $\epsilon$  is the target error for the gradients. However, one can further improve the scaling in the number of greeks  $k$ , using quantum algorithms for computing the gradients [8, 9]. A quantum algorithm to compute the gradient's components in superposition was originally introduced by Jordan in Ref. [9] and more recently revisited by Gilyen, Arunachalam, and Wiebe (GAW) [8].

Gilyen et al. [8] perform a rigorous analysis of Jordan's original quantum gradient algorithm [9] to show that in general it scales as  $\mathcal{O}(\sqrt{k}/\epsilon^2)$ . They then generalize that algorithm to arbitrary higher order  $m$  and show that an order  $m = \log(\sqrt{k}/\epsilon)$  quantum gradient algorithm has runtime of  $\mathcal{O}(\sqrt{k}/\epsilon)$  for a specific class of smooth functions. For the sake of simplicity, in the rest of the manuscript we call this result as *GAW quantum gradient* algorithm, from the name of the authors of Ref. [8]. Quantum gradient algorithms have also been previously studied as a subroutine for accelerated convex optimization [10]. Since, in this optimization context, subtleties connected with the error's scaling and parameters setting were found to be important, it is timely to put forward a comprehensive study on the advantage that could be found in financial applications.

In this work, we apply the algorithmic framework from [8] to compute financial greeks and study several varieties of quantum gradient algorithms. We use the quantum pricing method of Chakrabarti et al. [5] as a subroutine to the GAW algorithm to numerically estimate the resource requirements of computing the greeks of two types of option contracts (a) a European call option, which we use as a benchmark to establish the validity of the algorithm and estimate the corresponding resource requirements, and (b) a path-dependent basket option whose pricing profile is representative of typical financial derivative contracts of practical interest.

Then, we introduce a second-order accurate quantum gradient algorithm, the  $m = 1$  version of [8], for which we can give an explicit and compact quantum implementation in the financial derivative case, and which does not rely on block encoding or Hamiltonian simulation. We use this *Simulation-Free Quantum Gradient* (SFQG) method to compute the greeks of a path-dependent derivative and find that it is significantly cheaper to construct than the Hamiltonian-based method. Additionally, we show that we can improve the overall performance of quantum gradient estimation algorithms by employing a maximum likelihood (MLE) method to extract the most likely estimate of the gradients with concrete confidence intervals. With these tools, we calculate that quantum advantage for calculating risk may be achievable with quantum computers whose clock rates are 50 times slower than that required for pricing itself. We discuss these implications in more detail in Sec. VII.

Finally, we perform a comparison between quantum, classical and semi-classical gradient estimation algorithms in the context of financial derivatives, summarized in Table IV.

We highlight the new contributions in this work:

- We numerically study the quantum gradient estimation algorithms from [8, 9] for functions of practical interest to financial market risk and compare the observed oracular cost to theoretical expectations. (Section IV)
- We devise a method to construct a second-order accurate oracle for quantum gradient estimation for functions computed using quantum amplitude estimation that is cheaper in required resources compared to existing methods. (Section V)
- We introduce a way to improve gradient estimation algorithms using classical maximum likelihood estimation (MLE). (Section VI)
- We propose a technique to employ automatic differentiation (AD) methods on quantum computers which can enhance the quantum gradient estimation performance in certain cases. (Appendix A)
- We update the resource estimates for quantum advantage in financial derivative pricing from prior research. (Section VII)

### A. Quantum Amplitude Estimation

Our gradient calculation algorithms extend the quantum accelerated method for derivative pricing that is based on quantum amplitude estimation (QAE) [11]. We review QAE here. Let the  $k$ -dimensional vector  $\mathbf{x}$  denote the set of market data parameters of the derivative represented as a basis state  $|\mathbf{x}\rangle$  and  $f(\mathbf{x})$  its price, rescaled to satisfy  $f(\mathbf{x}) \in [0, 1]$ . We assume the existence of a unitary operator  $\mathcal{A}(\mathbf{x})$  which produces the state

$$\mathcal{A} : |\vec{0}\rangle |\mathbf{x}\rangle \rightarrow \left( \sqrt{1 - f(\mathbf{x})} |\psi_0(\mathbf{x})\rangle |0\rangle + \sqrt{f(\mathbf{x})} |\psi_1(\mathbf{x})\rangle |1\rangle \right) |\mathbf{x}\rangle, \quad (1)$$

where  $|\psi_0(\mathbf{x})\rangle$  and  $|\psi_1(\mathbf{x})\rangle$  are arbitrary, normalized quantum states. The state  $|\mathbf{x}\rangle$  representing the market data parameters acts only as input to  $\mathcal{A}$  and we can ignore it for the remainder of this section. When an operator  $\mathcal{U}$  depends on some input  $|\mathbf{x}\rangle$ , we will henceforth write it as  $\mathcal{U}(\mathbf{x})$  to highlight the dependence.

Explicit constructions of  $\mathcal{A}(\mathbf{x})$  with resource estimates for specific path dependent derivative instances are given in Chakrabarti et al. [5]. QAE estimates  $f(\mathbf{x})$  with repeated applications of the operator  $\mathcal{Q}(\mathbf{x}) = \mathcal{A}(\mathbf{x})S_0\mathcal{A}^\dagger(\mathbf{x})S_{\psi_0}$ , where  $S_0 = \mathbb{I} - 2|\vec{0}\rangle\langle\vec{0}|$  and  $S_{\psi_0} = \mathbb{I} - 2|\psi_0(\mathbf{x})\rangle\langle 0| \langle 0| \langle\psi_0(\mathbf{x})|$ . The QAE algorithm relies on the fact that, by the construction of  $\mathcal{Q}(\mathbf{x})$ , the state produced after the application of  $\mathcal{A}(\mathbf{x})$  in Eq. (1) can be written in the eigenbasis of  $\mathcal{Q}(\mathbf{x})$  [11]

$$\frac{-i}{\sqrt{2}} \left( e^{i\theta(\mathbf{x})} |\psi_+(\mathbf{x})\rangle - e^{-i\theta(\mathbf{x})} |\psi_-(\mathbf{x})\rangle \right) \equiv |\Psi(\mathbf{x})\rangle, \quad (2)$$

where  $|\psi_+(\mathbf{x})\rangle$  and  $|\psi_-(\mathbf{x})\rangle$  are the eigenvectors of  $\mathcal{Q}(\mathbf{x})$  with eigenvalues  $e^{\pm 2i\theta(\mathbf{x})}$ , and  $f(\mathbf{x}) = \sin^2(\theta(\mathbf{x}))$ . Let integer  $m > 0$  denote the bits of precision with which we want to estimate the amplitude. Applying  $H^{\otimes m}$  on an  $m$ -qubit

Classical Finite Difference	CFD with CRN	Semi-classical	Jordan's	GAW Quantum Gradient
$\mathcal{O}(k/\epsilon^3)$	$\mathcal{O}(k/\epsilon^2)$	$\mathcal{O}(k/\epsilon)$	$\mathcal{O}(\sqrt{k}/\epsilon^2)$	$\mathcal{O}(\sqrt{k}/\epsilon)$

TABLE I. Summary of the complexity scaling of the different market risk algorithms. Here  $\epsilon$  is the absolute error in gradient estimation, and  $k$  is the dimension of the gradient. For the CFD and semi-classical methods, which depend additionally on the discretization step  $h$ , we assume the optimal choices, which are derived in Section II B.

register initialized at  $|0\rangle_m$  and using the register to control different powers of  $\mathcal{Q}(\mathbf{x})$ , a phase kickback of the eigenvalues of  $\mathcal{Q}(\mathbf{x})$  is induced onto the control register

$$\frac{1}{\sqrt{M}} \sum_{j=0}^{M-1} |j\rangle \mathcal{Q}^{2^j}(\mathbf{x}) |\Psi(\mathbf{x})\rangle = \frac{1}{\sqrt{M}} \sum_{j=0}^{M-1} e^{2ij\theta(\mathbf{x})} |j\rangle |\Psi_+(\mathbf{x})\rangle - \frac{1}{\sqrt{M}} \sum_{j=0}^{M-1} e^{-2ij\theta(\mathbf{x})} |j\rangle |\Psi_-(\mathbf{x})\rangle, \quad (3)$$

where  $|\Psi_{\pm}(\mathbf{x})\rangle = -ie^{\pm i\theta(\mathbf{x})} |\psi_{\pm}(\mathbf{x})\rangle / \sqrt{2}$  and  $M = 2^m$ . Finally, applying an inverse Quantum Fourier Transform on the first register and measuring in the computational basis gives an  $m$ -bit approximation of either  $\tilde{\theta}_+(\mathbf{x}) = M\theta(\mathbf{x})/\pi$  or  $\tilde{\theta}_-(\mathbf{x}) = -M\theta(\mathbf{x})/\pi$ . This can then be classically mapped to an estimate for  $f(\mathbf{x})$  using

$$\tilde{f}(\mathbf{x}) = \sin^2 \left( \frac{\pi \tilde{\theta}_{\pm}(\mathbf{x})}{M} \right). \quad (4)$$

In order to approximate  $\tilde{f}(\mathbf{x})$  within additive error  $\epsilon_p$  with high probability, QAE requires  $M = \mathcal{O}(1/\epsilon_p)$  invocations to  $\mathcal{Q}(\mathbf{x})$ . We measure the query complexity of the QAE algorithm by counting the number of calls to the oracles  $\mathcal{A}(\mathbf{x})$  and  $\mathcal{A}^\dagger(\mathbf{x})$  and this scales as  $\mathcal{O}(2/\epsilon_p)$ . In the case of financial derivatives, the function  $f$  is the expectation value of the payoff of a derivative contract. We explore this context in the following section.

## II. GRADIENT METHODS FOR FINANCIAL DERIVATIVES

In this section we describe several methods for computing the gradients of financial derivatives. The complexities of these approaches are summarized in Table I.

### A. Greeks

Let  $\mathbf{S}^t \in \mathbb{R}_+^d$  be a vector of values for  $d$  underlying assets at time  $t$ . Let  $(\mathbf{S}^0, \dots, \mathbf{S}^T) = \bar{\omega} \in \bar{\Omega}$  be a path of a discrete time multivariate stochastic process describing the values of those assets. We use both notations for a path in the text. The corresponding probability density function is denoted by  $\bar{p}(\bar{\omega})$ . Let  $g(\bar{\omega}) = g(\mathbf{S}^0, \dots, \mathbf{S}^T) \in \mathbb{R}$  be the discounted payoff of some derivative on those assets. To price the derivative we calculate

$$\mathbb{E}(g) = \int_{\bar{\omega} \in \bar{\Omega}} \bar{p}(\bar{\omega}) g(\bar{\omega}) d\bar{\omega} \approx \sum_{\omega \in \Omega} p(\omega) g(\omega), \quad (5)$$

where we have removed the bar notation to indicate that we have switched from a continuous to a discrete model of prices. Gradients of this price are known as greeks.

**Example 1 (Delta)** Consider a single underlying ( $d = 1$ ). We define the gradient of the underlying with respect to the spot price  $S^0$  as

$$\Delta = \frac{\partial \mathbb{E}(g)}{\partial S^0}. \quad (6)$$

Other commonly used greeks are gradients of the price with respect to the time  $T$  (*theta*), the volatility of the underlying model for  $S$  (*vega*), the correlation between assets, or other parameters. In general one calculates  $\mathbb{E}(g, \mathbf{x})$  for some model and/or market parameters  $\mathbf{x}$  and then wishes to compute the set  $\{\frac{\partial \mathbb{E}(g)}{\partial \theta_{i=1, \dots, k}}\}$ . Remarkably,  $k$  can be on the order of hundreds or thousands in practical cases. For this reason, a  $k$  scaling improvement represents an important advantage in this context.

## B. Classical Finite Difference

Let  $f(\mathbf{x}) = \mathbb{E}(g, \mathbf{x})$  be the pricing function for a fixed payoff  $g$ . Classically, we can compute the gradients of a function  $f : \mathbb{R}^k \rightarrow \mathbb{R}$  using finite-difference methods by sampling the function  $f$  over a sufficiently small region  $h$  so that expanding  $f$  to first order gives a good approximation to  $f(\mathbf{x}) \approx f(\mathbf{a}) + (\mathbf{x} - \mathbf{a}) \cdot \nabla f$ . The simplest *forward* finite-difference classical scheme to compute the gradients at a point  $\mathbf{x}_0$  requires  $k + 1$  evaluations of  $f$ , one at  $\mathbf{x}_0$  and  $k$  evaluations displaced from  $\mathbf{x}_0$  by  $h$  in each dimension. The gradient is then approximated using  $\partial f / \partial x_i \approx [f(\mathbf{x}_0 + h\hat{e}_i) - f(\mathbf{x}_0)]/h + \mathcal{O}(h)$ , where  $\hat{e}_i$  is the  $i$ th normalized basis vector. For a more accurate approximation, we can instead use a second-order scheme which requires  $2k$  function evaluations, and approximate the gradients with

$$\partial f / \partial x_i \approx \frac{f(\mathbf{x}_0 + \frac{h}{2}\hat{e}_i) - f(\mathbf{x}_0 - \frac{h}{2}\hat{e}_i)}{h} + \mathcal{O}(h^2). \quad (7)$$

Now suppose that the function  $f(x)$  is evaluated with a finite accuracy  $\delta \geq 0$ . The associated error for the forward or central finite differences formulas reads

$$\frac{f(x+h) - f(x-(p-1)h) + \mathcal{O}(\delta)}{ph} + \mathcal{O}(h^p) = \partial_x f(x) + \mathcal{O}(\delta/h + h^p), \quad (8)$$

where  $p = 1$  for forward and  $p = 2$  for central finite differences. Suppose now that we want to achieve an overall estimation error of  $\epsilon > 0$ , i.e.

$$\delta/h + h^p \leq \epsilon, \quad (9)$$

where we focus on the asymptotic scaling. While the step size  $h$  can be freely chosen, improving the accuracy  $\delta$  is usually related to increasing computational costs. Thus, we want to maximize  $\delta$  by setting  $h$  while still achieving the target accuracy  $\epsilon$ . This leads to

$$\delta = (\epsilon - h^p)h = \epsilon h - h^{p+1}. \quad (10)$$

Setting the first derivative of the right-hand-side with respect to  $h$  to zero leads to

$$h = (\epsilon/(p+1))^{(1/p)}, \quad (11)$$

which leads to the optimal  $\delta$  for a target  $\epsilon$  given by

$$\delta = \mathcal{O}(\epsilon^{1+1/p}). \quad (12)$$

When  $f(x)$  is approximated by algorithms relying on sampling, the number of samples for a target approximation error scales as  $\delta = \mathcal{O}(1/M^q)$ , where  $M$  denotes here the number of samples and  $q$  depends on the convergence rate of the algorithm i.e.,  $q = 1/2$  for classical Monte Carlo simulation and  $q = 1$  for QAE. Then, combining everything together leads to

$$M = \mathcal{O}(\epsilon^{-(1+1/p)/q}). \quad (13)$$

Thus, using  $p = 2$  and  $q = 1/2$ , we calculate that the complexity of computing  $k$  greeks using a central-difference method with Monte Carlo is  $\mathcal{O}(k/\epsilon^3)$ . We call this approach the *classical finite difference* (CFD) method.

## C. Finite-Difference with Common Random Numbers

Another approach for computing greeks, when derivative pricing is done classically with Monte Carlo, is to use the second-order central-difference method of Eq. (7), but to perform correlated sampling by using the same random numbers in the Monte Carlo evaluation of both  $f(\mathbf{x}_0 + \frac{h}{2}\hat{e}_i)$  and  $f(\mathbf{x}_0 - \frac{h}{2}\hat{e}_i)$ . This way the statistical fluctuations present in both terms cancel out, effectively removing the overall error dependence on the discretization step  $h$ . The complexity of evaluating  $k$  greeks in this case is  $\mathcal{O}(k/\epsilon^2)$ , which is also classically optimal [12]. We call this method the *classical finite difference with common random numbers* (CFD-CRN).

### D. Semi-classical Quantum Gradients

A straightforward approach to improve the finite-difference method using quantum computation is to use a central-difference formula with quantum amplitude estimation for each pricing step [1, 4, 5]. This *semi-classical quantum gradient* (SQG) method [8] then scales as  $\mathcal{O}(k/\epsilon^{1.5})$ , which we get by substituting  $p = 2$  and  $q = 1$  in Eq. (13). This approach can be improved upon in a similar manner to using CRN for classical finite difference. Instead of computing  $\mathbb{E}(f(\mathbf{x}_0 + \frac{h}{2}\hat{e}_i))$  and  $\mathbb{E}(f(\mathbf{x}_0 - \frac{h}{2}\hat{e}_i))$  separately using amplitude estimation, we compute  $\mathbb{E}((f(\mathbf{x}_0 + \frac{h}{2}\hat{e}_i) - f(\mathbf{x}_0 - \frac{h}{2}\hat{e}_i))/h)$ . We can do this by computing  $|(f_\omega(\mathbf{x}_0 + \frac{h}{2}\hat{e}_i) - f_\omega(\mathbf{x}_0 - \frac{h}{2}\hat{e}_i))/h|$ , where  $f_\omega$  denotes the payoff for each path  $\omega$  (cf. Sec. II A) and then using amplitude estimation on this quantity. In this case the output of amplitude estimation is

$$\sum_{\omega \in \Omega} p(\omega) (f_\omega(\mathbf{x}_0 + (h/2)\hat{e}_i) - f_\omega(\mathbf{x}_0 - (h/2)\hat{e}_i)) / h \approx \mathbb{E}(\partial_i f(\mathbf{x})), \quad (14)$$

giving us the expectation value of the finite difference approximation of the  $i$ th derivative. The advantage of this method is that there are no separate statistical fluctuations associated individually with  $f_\omega(\mathbf{x}_0 \pm (h/2)\hat{e}_i)$  and we recover the standard  $\mathcal{O}(1/\epsilon)$  scaling of amplitude estimation. For  $k$  gradients, we then get an overall complexity of  $\mathcal{O}(k/\epsilon)$ .

### E. Quantum Gradients

There are other quantum approaches that use a quantum Fourier transform to compute the gradient with an improved scaling in the dimension  $k$  [8, 9]. These algorithms require access to a fractional *phase oracle* for the target function  $f : \mathbb{R}^k \mapsto \mathbb{R}$ , in our case the pricing function of Sec. I A. This oracle, given a point  $\mathbf{x} \in \mathbb{R}^k$  and  $S > 0$ , performs the operation

$$O_{Sf} : |\mathbf{x}\rangle \rightarrow e^{2\pi i S f(\mathbf{x})} |\mathbf{x}\rangle. \quad (15)$$

In order to estimate the  $k$ -dimensional gradient of  $f$  at point  $\mathbf{x}_0$ , the oracle is evaluated over a uniform superposition of  $N$  points  $\boldsymbol{\delta}$  in a sufficiently small  $k$ -dimensional discretized hypercube  $G_{\mathbf{x}_0}^k$  of edge length  $l$  around  $\mathbf{x}_0$ , such that

$$\frac{1}{\sqrt{N^k}} \sum_{\boldsymbol{\delta} \in G_{\mathbf{x}_0}^k} O_{Sf} |\boldsymbol{\delta}\rangle = \frac{1}{\sqrt{N^k}} \sum_{\boldsymbol{\delta} \in G_{\mathbf{x}_0}^k} e^{2\pi i S f(\mathbf{x}_0 + \boldsymbol{\delta})} |\boldsymbol{\delta}\rangle \approx e^{2\pi i S f(\mathbf{x}_0)} \frac{1}{\sqrt{N^k}} \sum_{\boldsymbol{\delta} \in G_{\mathbf{x}_0}^k} e^{2\pi i S \cdot \nabla f_{\mathbf{x}_0} \cdot \boldsymbol{\delta}} |\boldsymbol{\delta}\rangle, \quad (16)$$

assuming  $f(\mathbf{x}_0 + \boldsymbol{\delta}) \approx f(\mathbf{x}_0) + \nabla f_{\mathbf{x}_0} \cdot \boldsymbol{\delta}$  for  $\|\boldsymbol{\delta}\| \ll 1$ . Applying the  $k$ -dimensional inverse Quantum Fourier Transform on the resulting state with a appropriately chosen value of  $S$  and measuring in the computational basis gives us an approximation of  $\nabla f_{\mathbf{x}_0}$  with accuracy  $\epsilon = \mathcal{O}(1/N)$  and high probability. The complexity of these gradient estimation algorithms depends on the resources required to construct the oracle of Eq. (15) and the size of  $G_{\mathbf{x}_0}^k$  required to make the approximation in Eq. (16) sufficiently accurate.

## III. HIGHER-ORDER METHODS FOR QUANTUM GRADIENTS

Gilyen et al [8] showed that in order to estimate  $k$  gradients of a function  $f$  with accuracy  $\epsilon$ , the oracle in Eq. (15) has to be evaluated  $S = N/l \sim D_2 \sqrt{k}/\epsilon^2$  times, where  $D_2$  is an upper bound on the magnitude of the second-order derivatives of  $f$ . While this gives a quadratically improved scaling in  $k$ , it does not improve on the error scaling of the semi-classical method. To improve also the scaling in accuracy  $\epsilon$ , Ref. [8] introduces higher-degree central-difference schemes.

The  $2m$ -point central-difference approximation for the gradient of  $f$  at  $\mathbf{0}$  is given by

$$\nabla f_{(2m)}(\mathbf{0}) = \sum_{\ell=-m}^m a_\ell^{(2m)} f(\ell \mathbf{x}), \quad (17)$$

where the coefficients  $a_\ell^{(2m)}$  depend on the choice of  $m$  and for uniform grid spacing we have  $a_\ell^{(2m)} = -a_{-\ell}^{(2m)}$  [13]. A phase oracle for the general  $2m$ -point scheme of Eq. (17) can be constructed by composing individual fractional phase

oracles for each of the  $2m$  terms, scaled by the appropriate coefficient  $a_\ell^{(2m)}$ . This leads to a family of algorithms with different phase oracles at different orders  $m$

$$O_{Sf}^m : |\mathbf{x}\rangle \rightarrow e^{2\pi i S \sum_{\ell=-m}^m a_\ell^{(2m)} f(\ell\mathbf{x})} |\mathbf{x}\rangle, \quad (18)$$

with  $S = N/l$ . For example, the phase oracle for the two-point approximation

$$O_f^1 |\mathbf{x}\rangle = e^{2\pi i (f(\mathbf{x}) - f(-\mathbf{x}))/2} |\mathbf{x}\rangle, \quad (19)$$

can be constructed as the product of oracles  $O_f^+ \mathbf{x} = e^{\pi i f(\mathbf{x})} |\mathbf{x}\rangle$  and  $O_f^- \mathbf{x} = e^{-\pi i f(-\mathbf{x})} |\mathbf{x}\rangle$ .

With these higher-order methods, they show that estimating the gradients of a class of smooth functions<sup>1</sup> to accuracy  $\epsilon$  using Jordan's algorithm, can instead be done with  $S = \mathcal{O}(\sqrt{k}/\epsilon)$  phase oracle applications by picking a large enough value for  $m$  in the central-difference approximation used. Therefore, for this family of smooth functions, gradient estimation using high-order central-difference methods scales quadratically better in the desired accuracy  $\epsilon$  compared to the original Jordan's algorithm. This is described formally in the following Theorem:

**Theorem 1 (5.4 from [8])** *Let  $\mathbf{x} \in \mathbb{R}^k, \epsilon < c \in \mathbb{R}_+$  be fixed constants and suppose  $f : \mathbb{R}^k \mapsto \mathbb{R}$  is analytic and satisfies the following: for every  $j \in \mathbb{N}$  and  $\alpha \in [k]^j$*

$$|\partial_\alpha f(\mathbf{x})| \leq c^j j^{\frac{j}{2}}. \quad (20)$$

*Using the GAW Algorithm and setting  $m = \log(c\sqrt{k}/\epsilon)$  and rescaling  $R = \Theta(cm\sqrt{k})$  we can compute an  $\epsilon$ -approximate gradient  $\tilde{\nabla}f(\mathbf{x}) \in \mathbb{R}^k$  such that*

$$\|\nabla f(\mathbf{x}) - \tilde{\nabla}f(\mathbf{x})\|_\infty \leq \epsilon, \quad (21)$$

*with probability at least  $1 - \delta$ , using  $\tilde{\mathcal{O}}\left(\frac{c\sqrt{k}}{\epsilon} \log\left(\frac{k}{\delta}\right)\right)$  queries to a probability or (fractional) phase oracle of  $f$ .*

In addition to the desired  $\mathcal{O}(\sqrt{k}/\epsilon)$  scaling, the complexity of the GAW algorithm in Theorem 1 includes a factor of  $\log(k/\delta)$  stemming from the fact that we need to extract the medians after the application of the quantum gradient estimation algorithm, with probability of  $1 - \delta$ . While in the following sections we focus on the  $\mathcal{O}(\sqrt{k}/\epsilon)$  factor in order to establish the dominant scaling of the complexity with respect to  $k$ , in Sec. VI we show how we can eliminate the  $\log(k/\delta)$  factor by using classical maximum likelihood estimation. This approach not only decreases the overall computational complexity of the algorithm, but also provides us with concrete confidence intervals for a given confidence level.

We summarize in Table I the scaling in  $k$  and  $\epsilon$  of the algorithms discussed in this Section.

### A. Creating phase oracles from probability oracles

Because the function whose gradients we would like to compute is only accessible through a *probability oracle* in the form of Eq. (1), we need to create a corresponding *phase oracle* of Eq. (15) in order to use the quantum gradient method described in this section. To do so, we can use the block encoding technique from Ref. [8]:

**Definition 1 (4.4 from [8])** *Suppose that  $A$  is an operator on a Hilbert space  $\mathcal{H}$ , then we say that the unitary  $U$  acting on  $\mathcal{H}_{aux} \otimes \mathcal{H}$  is a block-encoding of  $A$  if*

$$A = (\langle \vec{0} | \otimes \mathbb{I}) U (| \vec{0} \rangle \otimes \mathbb{I}).$$

Intuitively, the block-encoding  $H$  is a unitary whose top-left block contains  $A$ .

$$U = \begin{bmatrix} \mathcal{A} & \cdot \\ \cdot & \cdot \end{bmatrix}$$

---

<sup>1</sup> Also known as Gevrey class  $G^{\frac{1}{2}}$  functions [14]

For the probability oracle  $\mathcal{A}(\mathbf{x})$  of Eq. (1), the authors of Ref. [8] observe that

$$(|\vec{0}\rangle \otimes \mathbb{I})(\mathcal{A}^\dagger(\mathbf{x})(Z \otimes \mathbb{I})\mathcal{A}(\mathbf{x}))(|\vec{0}\rangle \otimes \mathbb{I}) = \text{diag}(1 - 2f(\mathbf{x})), \quad (22)$$

and from Definition 1,  $U \equiv \mathcal{A}^\dagger(\mathbf{x})(Z \otimes \mathbb{I})\mathcal{A}(\mathbf{x})$  is a block-encoding of a diagonal matrix  $H$  with diagonal entries  $(1 - 2f(\mathbf{x}))$ . With access to this block-encoding, the Hamiltonian simulation method from [15, 16] allows us to implement an  $\epsilon_{\text{phase}}$ -approximation of the unitary  $e^{itH}$ , through repeated applications of  $U$  and  $U^\dagger$ , which scales as  $\mathcal{O}(|t| + \ln(1/\epsilon_{\text{phase}}))$ . Therefore, for appropriately chosen values of  $t$ , we can use block-encoding and Hamiltonian simulation to produce an  $\epsilon_{\text{phase}}$ -approximation of the phase oracle  $O_{Sf}$  from Eq. (15). Note that while the block-encoding of Eq. (22) allows us to create a phase oracle with phase of  $1 - 2f(\mathbf{x})$  instead of  $f(\mathbf{x})$  in Eq. (15), the first term ends up as a global phase which can be ignored, and the factor of  $-2$  can be absorbed in the factor  $t$  of the Hamiltonian simulation.

While references [15, 16] describe how to perform Hamiltonian simulation and the resources required to realize the necessary unitary evolution, the methods presented therein require post-selection, which needs to be factored in for an end-to-end resource estimation. On the other hand, Ref. [17] introduces a coherent Hamiltonian simulation method which does not require post-selection and instead succeeds with arbitrarily high probability  $1 - \delta$ , scaling as  $\mathcal{O}(|t| + \ln(1/\epsilon_{\text{phase}}) + \ln(1/\delta))$ . For a target  $t$ , approximation error  $\epsilon_{\text{phase}}$  and  $\delta = 2\epsilon_{\text{phase}}$ , this coherent Hamiltonian simulation algorithm queries  $U$  and its inverse a total number of times

$$N_U(t, \epsilon_{\text{phase}}, \beta) = 2 \left\lceil \frac{1}{2} r \left( \frac{e|t|}{2\beta}, \frac{5\epsilon_{\text{phase}}}{24} \right) \right\rceil + \gamma \left( \frac{\epsilon_{\text{phase}}}{3}, 1 - \beta \right) + 1, \quad (23)$$

where

- $\beta \in (0, 1)$  is a user-chosen parameter,
- $r(\tau, \epsilon) = \lceil \tau |e^{W(\ln(1/\epsilon)/|\tau|)}| \rceil$ , where  $W(x)$  is the Lambert- $W$  function,
- $\gamma(\epsilon, \Delta) = 2 \cdot \left\lceil \max \left( \frac{\epsilon}{\Delta} \sqrt{W \left( \frac{8}{\pi\epsilon^2} \right) W \left( \frac{512}{e^2\pi\epsilon^2} \right)}, \sqrt{2} W \left( \frac{8\sqrt{2}}{\sqrt{\pi}\Delta\epsilon} \sqrt{W \left( \frac{8}{\pi\epsilon^2} \right)} \right) \right) \right\rceil + 1$ .

Using this method, the total number of oracle (Eq. 1) calls required to construct an  $\epsilon_{\text{phase}}$ -approximation of the  $m$ -order phase oracle of Eq. (18) is then given by

$$N_o = \sum_{\ell=-m}^m N_U \left( 2\pi \frac{N}{t} |a_\ell^{(2m)}|, \epsilon_{\text{phase}}, \beta \right). \quad (24)$$

The optimal value of  $\beta$  depends on the target approximation error  $\epsilon_{\text{phase}}$ . For the cases studied in this manuscript, we find that  $\beta = 0.5$  is the optimal choice and we fix that value whenever we use Eq. (24).

#### IV. RESOURCE ESTIMATION OF QUANTUM GRADIENT METHODS

In this section, we perform an asymptotic resource estimation for the gradient methods described previously. We choose representative parameters from the financial domain for gradient estimation problems, targeting  $k = 1000$  grecks and an approximation error of  $\epsilon = 10^{-3}$ . For the resource estimation of the GAW method, we assume that the smoothness conditions of Theorem 1, with smoothness parameter  $c = 1$ , apply for the problem at hand and that the Hamiltonian simulation phase error is  $\epsilon_{\text{phase}} = 10^{-4}$ . Here we choose  $c = 1$  in order to estimate the possible usefulness of the algorithm in a best-case scenario of smoothness from Theorem 1. While we treat the phase error  $\epsilon_{\text{phase}}$  as a free parameter at this point, our particular choice of  $10^{-4}$  is motivated by numerical simulations which show this to be a good choice. We discuss the numerical simulations and the impact of the phase error in more detail in subsequent sections. Then, we set the finite-difference approximation degree to

$$m = \log(c\sqrt{k}/\epsilon) \quad (25)$$

and the spacing parameter to<sup>2</sup>

$$t^{-1} = 9cm\sqrt{k} \left( 81 \times 8 \times 42\pi cm\sqrt{k}/\epsilon \right)^{1/(2m)}. \quad (26)$$

<sup>2</sup> See proof of Theorem 5.4 from [8]

Using the proofs from [8] we can estimate the number of oracle calls that will be required to achieve the target error. Notice that, in these estimates, we consider only the asymptotic scaling (assuming remaining constant factors are 1) and assume that  $\epsilon_{\text{phase}}$  is sufficiently small to have no impact on performance. This results in  $6.3 \times 10^7$  oracle calls.

We can compare this asymptotically to the performance of both classical finite difference (with common random numbers and without) and semi-classical quantum finite difference. These results are summarized in Table II. We choose the optimal values of the discretization step  $h$  as calculated in Section II B to minimize the gradient estimation error  $\epsilon$ , and pick  $\epsilon = 10^{-3}$  for these benchmarks.

Classical Finite Difference	CFD with CRN	Semi-classical	GAW Quantum Gradient
$10^{12}$	$10^9$	$10^6$	$10^7$

TABLE II. Table of asymptotic oracle calls required to compute quantum gradients for financially relevant greeks. Parameters for this benchmark are described in the text. This asymptotic analysis indicates that quantum gradient method has potential to outperform classical finite difference methods but is on par with semi-classical methods.

In Table II, we notice that using the parameters from the proofs in [8], the GAW algorithm fails to deliver an advantage compared to the semi-classical method for  $k$  as high as  $10^3$ . However, while this analysis gives us an idea of how the different methods compare in theory, the estimates are based on asymptotic bounds with parameters which may be loose in practice and are highly dependent on the smoothness of the functions considered. In the following section we study the performance of the GAW method numerically on small examples that are representative of some practical cases in finance.

### A. GAW Numerical estimates

The GAW method described in Sec. III gives a quantum algorithm for gradient estimation which scales as  $\mathcal{O}(\sqrt{k}/\epsilon)$  when the target function satisfies the conditions of Theorem 1. However, in most relevant financial models of interest, we do not have access to closed-form solutions that we can examine to check whether they satisfy the smoothness conditions required of the theorem. As such, in this section we numerically examine the behavior of the high-order methods of the GAW gradient estimation algorithm for two financial use cases: (a) A simple (*vanilla*) European call option for which we have an analytical closed form solution and can benchmark the performance of the algorithm against the exact gradients, and (b) a path-dependent basket option with a *knock-in* feature which has no known analytical solution and is in practice classically evaluated using Monte Carlo methods. In particular, we examine the central-difference approximation order  $m$  and spacing  $l$  required for adequately precise gradient estimation and compare it to the theoretical values of Eq. (25) and Eq. (26) respectively. We focus on these two parameters because they determine the overall complexity of the algorithm, which we can then compare to the other methods of Table II.

Because the resulting quantum circuits are prohibitively wide and deep for numerical simulation in practice, we adopt the following practical method to emulate the algorithm's performance: to estimate  $k$  greeks using  $n$  bits of precision we initialize a  $k * 2^n$ -dimensional array with the amplitudes of Eq. (18) computed classically for the chosen derivative order  $m$ . We then perform a  $k * 2^n$ -dimensional classical inverse Fourier transform of the array to get the resulting probability distribution which is the output of the GAW algorithm before measurement. In order to account for the phase error  $\epsilon_{\text{phase}} > 0$  from the Hamiltonian simulation, we add a random number to each encoded phase in Eq. (18), uniformly picked from the interval  $[-\epsilon_{\text{phase}}, \epsilon_{\text{phase}}]$ .

#### 1. Vanilla Options

The simplest example in derivative pricing is a European call option whose price depends on the performance of a single asset at a pre-determined future time (the *expiration* date), relative to a reference price (the *strike*). In the Black-Scholes-Merton model [18], where the asset undergoes Geometric Brownian Motion (GBM), a call option on a non dividend-paying asset has a closed form solution given by

$$C = SN(d_1) - Ke^{-rT}N(d_2), \quad \text{with } d_1 = \frac{\ln(S/K) + (r + \sigma^2/2)T}{\sigma\sqrt{T}}, \quad d_2 = d_1 - \sigma\sqrt{T}, \quad (27)$$

where  $S$  is the asset price today,  $K$  the strike of the option,  $r$  is a risk-free rate of return,  $\sigma$  the annualized volatility of the asset,  $T$  is the time until the option's expiration date and  $N(x)$  denotes the CDF of the standard normal



distribution. We test the quantum gradient estimation algorithm for the four greeks of this option/model:  $\delta = \partial C / \partial S$ ,  $\rho = \partial C / \partial r$ ,  $\nu = \partial C / \partial \sigma$ , and  $\theta = \partial C / \partial T$ . We numerically simulate the GAW algorithm for increasing  $k$  (the number of greeks we compute simultaneously) and central-difference approximation order  $m \in [1, 4]$ . In each case we search for the largest value of the spacing  $l$  in for which the algorithm produces an estimate  $\epsilon$ -close to the exact value with probability  $\geq 85\%$  for each greek. We target a gradient error of  $\epsilon = 2 \times 10^{-2}$  which requires  $n = \lceil \log(1/\epsilon) \rceil = 6$  qubits in each dimension.<sup>3</sup>

For each value of  $k$ , we then compare what we numerically find as the optimal values for  $(m, l)$  — that minimize the total number of oracle calls  $N_o$  from Eq. (24) while maintaining a success probability of  $\geq 85\%$  — to those used in the proof of Theorem 1, given by Eq. (25) and Eq. (26), assuming the smoothest possible parameter  $c = 1$ . We set the approximation error from the Hamiltonian simulation to  $\epsilon_{\text{phase}} = 10^{-4}$  and include it as an error source in our numerical simulations. The gradients of the vanilla option in Eq. (27) are evaluated at the point  $(S, r, \sigma, T) = (99.5, 1\%, 20\%, 0.1)$ , with  $K = 100$ , chosen so that the parameter values are reasonably realistic from a finance point of view, but at the same time probing a domain where the function is as non-linear as possible.<sup>4</sup> In Table III we show the results of the numerical simulation and the corresponding theoretical estimates from Theorem 1 and in Fig. 1 we show the resulting probability distribution from the quantum gradient estimation algorithm for each greek, for the case  $k = 4$  in Table III.

$k$	Numerical			Theoretical		
	$m$	$l$	$N_o$	$m$	$l$	$N_o$
2	1	0.65	1976	5	0.0028	570592
3	3	0.65	4664	5	0.0022	712008
4	3	0.58	4904	5	0.0019	833296

TABLE III. In this table we show (a) numerical estimates of the query complexity  $N_o$  (Eq. (24)) and parameter values  $(m, l)$  required by the GAW gradient estimation algorithm in order to estimate  $k$  greeks for the vanilla option of Eq. (27) within  $\epsilon = 2 \times 10^{-2}$  with probability  $\geq 85\%$  and (b) the corresponding values used in the proof of Theorem 1. We notice that for a vanilla option, we can reduce the central-difference order and increase the spacing by more than two orders of magnitude compared to the theoretical values. As such, the query complexity we estimate numerically is  $\sim 200$  times smaller than the theoretical.

Interestingly, we notice from Table III that the query complexity required to estimate the gradients of the vanilla option with high probability in practice, is orders of magnitude smaller than what is expected from the parameters used in proof of Theorem 1. Because the types of vanilla options explored in this section are primarily a motivating example of relevance to finance that are simpler to analyze, we now turn our attention to more complex derivatives for which gradient estimation is required for business use in practice.

## 2. Path-dependent Basket Options

In the previous section, we numerically examined the performance of the GAW algorithm for vanilla options for which we have analytical solutions and we can benchmark the algorithm's performance compared to the exact gradients of the model. We now perform a similar analysis to a path-dependent option on multiple underlying assets, which has no known closed form solution, and compare the query complexity from the numerical simulation to the theoretical complexity from Theorem 1 as well as to that of the SQG method (Sec. IID) which calculates gradients using finite-difference using values estimated using QAE. Similarly to the previous section, we set the approximation error from the Hamiltonian simulation to  $\epsilon_{\text{phase}} = 10^{-4}$ .

The option we consider in this section is defined on three underlying assets undergoing GBM with volatilities  $\sigma_1 = 20\%$ ,  $\sigma_2 = 20\%$ ,  $\sigma_3 = 10\%$  and spot prices  $\vec{S}(t=0) = (S_1(t=0), S_2(t=0), S_3(t=0)) = (2.0, 2.0, 2.0)$ . The risk free rate is set to  $r = 1\%$  and the option expires in  $T = 3$  years. The weighted sum of the asset prices  $\vec{w} \cdot \vec{S}(t)$  with weights  $\vec{w} = (w_1, w_2, w_3) = (0.5, 0.3, 0.2)$  is observed on five days  $t^B = [T/5 * i]$  for  $i \in [1, 5]$  across the duration of the

<sup>3</sup> Our numerical simulations scale exponentially in this parameter as are emulating the quantum circuit on these qubits. This limits us to this size.

<sup>4</sup> Where the function is (approximately) linear then simple finite difference methods perform well already.

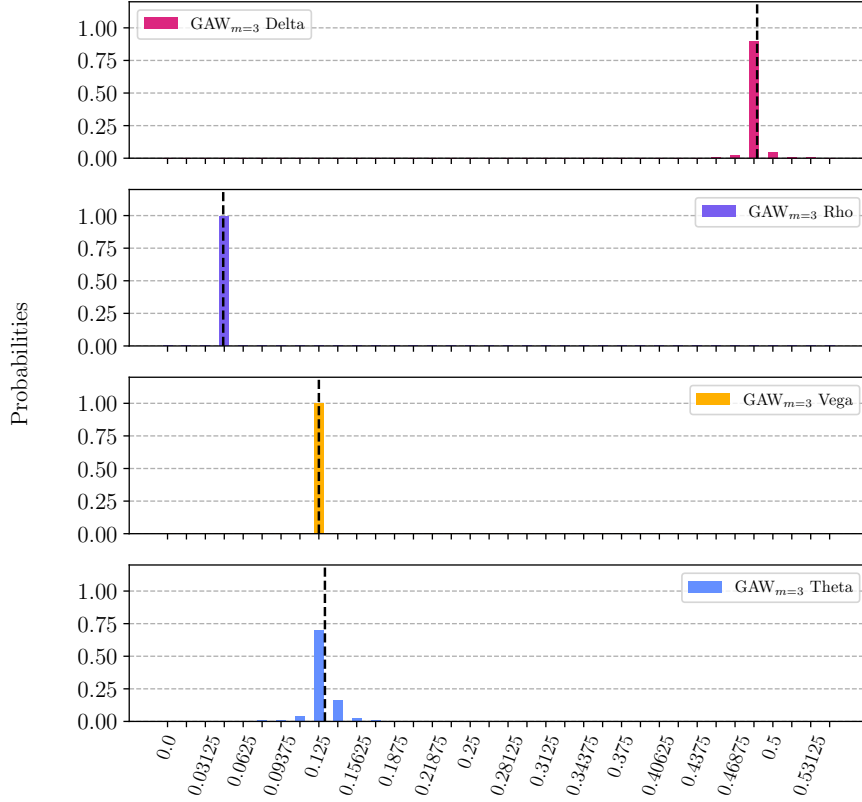


FIG. 1. The probability distribution resulting from the numerical simulation of the GAW quantum gradient estimation algorithm with  $m = 3$  and  $l = 0.58$  for the four greeks (delta, rho, vega, theta) of the vanilla option of Eq. (27), and the corresponding exact values shown as dashed vertical lines. Measurement of the registers corresponding to each greek will result in a value at most  $\epsilon = 1/N = 2 \times 10^{-2}$  away from the exact value with probability  $\geq 85\%$ .

contract and the option's payoff is given by

$$f(\vec{S}(t), K, B) = \begin{cases} \max(\vec{w} \cdot \vec{S}(T) - K, 0), & \text{if } \vec{w} \cdot \vec{S}(t) > B \text{ for any } t \in t^B \\ 0, & \text{otherwise,} \end{cases} \quad (28)$$

where we set the strike  $K = 1.0$  and  $B = 2.5$ . This option is said to have a *knock-in* feature, because it only pays off (i.e is *knocked-in*) if the observed weighted sum exceeds the knock-in barrier  $B$  at any of the pre-defined times before the contract's expiration. We simulate the GAW algorithm to estimate four gradients of this option contract's price  $V$ : the three deltas ( $\partial V / \partial S_i$ ) and the vega with respect to the first asset  $\partial V / \partial \sigma_1$ . Because this option does not have a closed-form solution, we price the option using classical Monte Carlo with  $10^6$  paths and use finite-difference to compute the expected gradients which we use as benchmarks for the quantum algorithm. The quantum algorithm is simulated using  $n = 4$  qubits for each gradient register, which sets the target error of the algorithm to  $\epsilon \leq 1/2^4 = 0.0625$ . Using  $m = 1$  and  $l = 0.25$  the simulated GAW algorithm gives us an  $\epsilon$ -close estimate with probability  $\geq 85\%$  for each greek. The SQG method requires  $1/\epsilon$  calls to the  $\mathcal{Q}$  operator of QAE, and each  $\mathcal{Q}$  includes two calls to the unitary  $\mathcal{A}$  of Eq. (1) and its inverse, therefore the complexity for  $k$  greeks is  $2k/\epsilon$ . Because with the SQG method we need to compute the payoff twice in order to construct the finite difference (Eq. (14)), the  $\mathcal{A}$  operator will be approximately twice as large as the regular pricing oracle. In order to compare the query complexity more accurately with the other quantum methods we thus include a factor of two in the complexity, for a total of  $4k/\epsilon$ .

In Table IV we show the query complexity and parameters from the numerical simulation of the GAW method for this path-dependent basket option, along with (a) the asymptotic estimates from Theorem 1, (b) the query complexity of the SQG method and (c) the query complexity of the CFD and CFD-CRN methods, all for the same target approximation error. For the CFD and CFD-CRN methods, the reported query complexity is the total number of Monte Carlo paths required for the evaluation of the  $k$  greeks within the target approximation error  $\epsilon$  with probability  $\geq 85\%$ , computed numerically. The table also includes the parameters and resources required for the

same calculation using the *Simulation-Free Quantum Gradient* (SFQG) algorithm described in the next section. The resulting probability distribution for all greeks along with the MC-estimated “true” values is shown in Fig. 2.

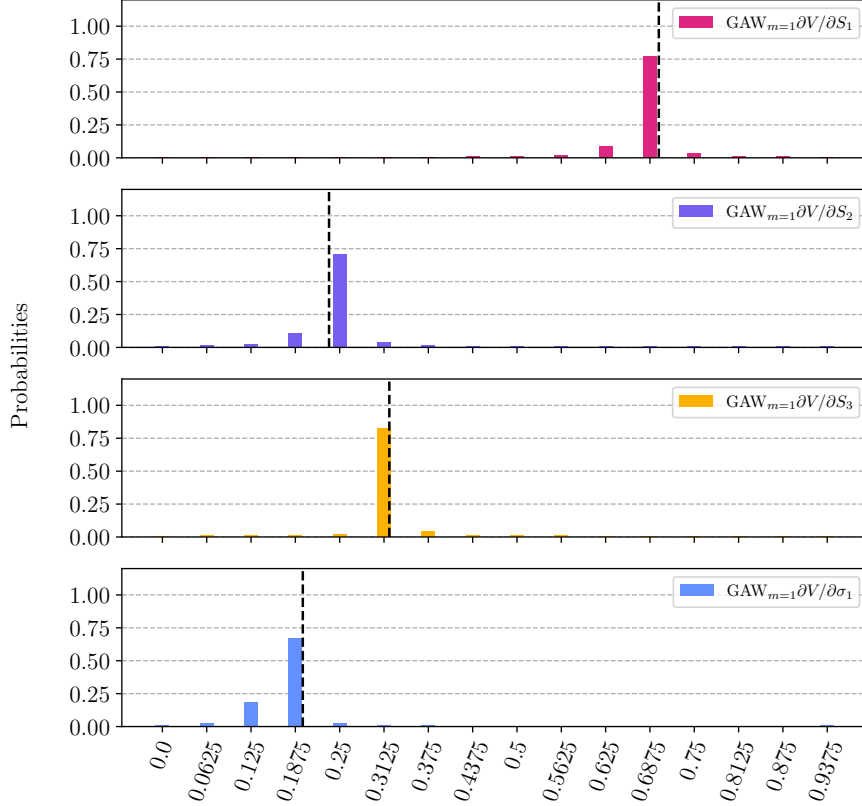


FIG. 2. The probability distribution resulting from the numerical simulation of the GAW quantum gradient estimation algorithm with  $m = 1$  and  $l = 0.25$  for the four greeks of the path-dependent basket option of Sec. IV A 2, along with the values estimated using classical Monte Carlo (MC) with  $10^6$  paths (vertical dashed lines). Measurement gives us estimates for each greek with error  $\epsilon \leq 0.0625$  with probability  $\geq 85\%$ .

## V. SIMULATION-FREE QUANTUM GRADIENT METHOD

In this section, we construct a second-order accurate quantum gradient algorithm, corresponding to  $m = 1$  in Eq. (17). This is higher order than Jordan’s algorithm, which has unfavorable scaling, but lower order than required from the analysis in Gilyen et al. to guarantee the  $\mathcal{O}(\sqrt{k}/\epsilon)$  scaling. A benefit is that, in the case of derivative pricing, we are able to give an explicit construction of the phase oracle without needing to appeal to block encoding or Hamiltonian simulation. We call this the *Simulation-Free Quantum Gradient* (SFQG) method.

To describe this construction, we first show how to turn the derivative pricing setting of Sec. IA into a first-order phase oracle  $O_{Sf}^1$  and then how to build a second-order extension to construct  $O_{Sf}^2$ . We then simulate this algorithm to estimate the greeks of the basket option from Sec. IV A 2, allowing us to compare its performance to the corresponding second-order accurate GAW method.

### A. First-Order Pricing Phase Oracle

In order to apply the quantum gradient algorithms, we need to construct a phase oracle of the form of Eq. (15). We evaluate this oracle on a superposition of points  $\delta$  in a  $k$ -dimensional hypercube of edge length  $l$ ,  $G^k = [-l/2, l/2]^k$  around  $\mathbf{x}_0$ , with  $l$  chosen small enough so that  $f(\mathbf{x}_0 + \delta)$  is approximately linear in that region. Let  $\mathbf{x} \equiv \mathbf{x}_0 + \delta$  and

construct the following unitary  $\mathcal{A}_\theta(\mathbf{x})$

$$\begin{aligned} \mathcal{A}_\theta(\mathbf{x}) : \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} |\mathbf{x}\rangle |0\rangle_{q+1} &\xrightarrow{\mathbb{I}^{\otimes nk} \otimes \mathcal{A}(\mathbf{x})} \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} |\mathbf{x}\rangle \left( \sqrt{1-f(\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{f(\mathbf{x})} |\psi_1\rangle_q |1\rangle \right) \\ &= \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} |\mathbf{x}\rangle (|\Psi_+(\mathbf{x})\rangle - |\Psi_-(\mathbf{x})\rangle) \end{aligned} \quad (29)$$

where  $|\Psi_\pm(\mathbf{x})\rangle = -ie^{\pm i\theta(\mathbf{x})} |\psi_\pm(\mathbf{x})\rangle / \sqrt{2}$  and  $\theta(\mathbf{x}) = \sin^2(f(\mathbf{x}))$ , similarly to Eq. (3). Now, define a modified Grover operator  $\mathcal{Q}_\theta(\mathbf{x}) = \mathcal{A}_\theta(\mathbf{x}) \tilde{S}_0 \mathcal{A}_\theta^\dagger(\mathbf{x}) \tilde{S}_{\psi_0}$ , where  $\tilde{S}_0 = \mathbb{I}^{\otimes nk} \otimes (\mathbb{I} - 2|0\rangle_{q+1}\langle 0|_{q+1})$  and  $\tilde{S}_{\psi_0} = \mathbb{I}^{\otimes nk} \otimes (\mathbb{I} - 2|\psi_0\rangle_q \langle 0| \langle \psi_0|_q)$ . Let  $D$  be an upper bound on  $|\partial\theta(\mathbf{x})/\partial x_i|$  for all  $i \in [1, k]$  and apply  $\mathcal{Q}_\theta^{\pi S}(\mathbf{x})$  to the state in Eq. (29) with  $S = N/Dl$  to get

$$\mathcal{Q}_\theta^{\pi S}(\mathbf{x}) \mathcal{A}_\theta(\mathbf{x}) : \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} |0\rangle_{q+1} |\mathbf{x}\rangle \rightarrow \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{2\pi i S \theta(\mathbf{x})} |\mathbf{x}\rangle |\Psi_+(\mathbf{x})\rangle - \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{-2\pi i S \theta(\mathbf{x})} |\mathbf{x}\rangle |\Psi_-(\mathbf{x})\rangle. \quad (30)$$

Note that the application of  $O_{S\theta}(\mathbf{x}) = \mathcal{Q}_\theta^{\pi S}(\mathbf{x}) \mathcal{A}_\theta(\mathbf{x})$  in Eq. (30) is close to the phase oracle we are looking for in quantum gradient estimation, but (i) for  $\theta$  rather than  $f$ , and (ii) with a superposition over the positive and negative phases that we seek.

An inverse Quantum Fourier Transform  $(\mathcal{F}_n^{-1})^{\otimes k}$  on the first register then gives us an estimate of the derivatives of  $\theta(\mathbf{x})$  at  $\mathbf{x}_0$

$$\left| \frac{N}{D} \frac{\partial \theta}{\partial x_1} \right\rangle \left| \frac{N}{D} \frac{\partial \theta}{\partial x_2} \right\rangle \cdots \left| \frac{N}{D} \frac{\partial \theta}{\partial x_k} \right\rangle \quad \text{or} \quad \left| -\frac{N}{D} \frac{\partial \theta}{\partial x_1} \right\rangle \left| -\frac{N}{D} \frac{\partial \theta}{\partial x_2} \right\rangle \cdots \left| -\frac{N}{D} \frac{\partial \theta}{\partial x_k} \right\rangle. \quad (31)$$

This method gives us an oracle for  $\theta$  and not for  $f$  directly. However, because we know that  $\theta$  and  $f$  are related through  $\theta(\mathbf{x}) = \sin^2(f(\mathbf{x}))$ , we can compute the derivatives of  $\theta$  and then use the chain rule to get the gradients of  $f$ :

$$\pm \frac{\partial f}{\partial x_i} \Big|_{\mathbf{x}_0} = \pm \frac{\partial \theta}{\partial x_i} \Big|_{\mathbf{x}_0} \times \sin(2\theta(\mathbf{x}_0)). \quad (32)$$

This requires knowledge of  $\theta(\mathbf{x}_0)$  which can be calculated separately through standard QAE via the operator of Eq. (1).

The positive and negative cases can be distinguished by adding a dummy dimension to  $f$  with a gradient that has a known sign. For example one could change  $(f : \mathbb{R}^k \mapsto \mathbb{R}) \mapsto (f + 0.5x_{k+1} : \mathbb{R}^{k+1} \mapsto \mathbb{R})$ . Inspecting the sign of the  $k+1$ -th derivative tells us if we are in the positive or negative case.

## B. Second-Order Pricing Phase Oracle

The simplest high-order extension we can do is to construct an oracle which encodes the two-point approximation shown in Eq. (19), which corresponds to  $m = 1$  in Eq. (17). Because in the QAE setting we are computing the gradients of  $\theta(\mathbf{x}) = \sin^{-1} \sqrt{f(\mathbf{x})}$  instead of  $f(\mathbf{x})$ , we need to construct an oracle which performs

$$O_\theta |\mathbf{x}\rangle = e^{2\pi i S(\theta(\mathbf{x}) - \theta(-\mathbf{x}))/2} |\mathbf{x}\rangle, \quad (33)$$

where  $\theta(-\mathbf{x}) = \sin^{-1} \sqrt{f(-\mathbf{x})}$ . In [8], the authors suggest that high-order oracles of this form can be constructed as the product of two separate oracles with opposite phases, which in this case would be the QAE gradient oracles  $\mathcal{Q}_\theta^{\pi S}(\mathbf{x})$  and  $\mathcal{Q}_\theta^{\pi S}(-\mathbf{x})$  of Eq. (30). However, because these oracles encode both the positive and negative phases in superposition, their product generates the state

$$\frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{2\pi i S(\theta(\mathbf{x}) - \theta(-\mathbf{x}))} |\mathbf{x}\rangle |\psi_1(\mathbf{x})\rangle + \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{-2\pi i S(\theta(\mathbf{x}) - \theta(-\mathbf{x}))} |\mathbf{x}\rangle |\psi_2(\mathbf{x})\rangle \quad (34)$$

$$+ \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{2\pi i S(\theta(\mathbf{x}) + \theta(-\mathbf{x}))} |\mathbf{x}\rangle |\psi_3(\mathbf{x})\rangle + \frac{1}{\sqrt{N^k}} \sum_{\mathbf{x}} e^{-2\pi i S(\theta(\mathbf{x}) + \theta(-\mathbf{x}))} |\mathbf{x}\rangle |\psi_4(\mathbf{x})\rangle \quad (35)$$

where  $\psi_i$  denotes products of eigenstates of  $\mathcal{Q}(\mathbf{x})$  and  $\mathcal{Q}(-\mathbf{x})$  which we can then be ignored for the rest of the algorithm. While the first two terms contain the appropriate phase kickback (up to the sign) for the two-point approximation

method of Eq. (33), the last two terms encode a phase proportional to  $\theta(\mathbf{x}) + \theta(-\mathbf{x}) = \theta(\mathbf{x}_0) + \mathcal{O}(\partial^2\theta(\mathbf{x})/\partial\mathbf{x}^2)$ , which create a probability peak around zero instead of the gradient. We now show a way to construct the operator which encodes the phase as required by Eq. (33) without garbage terms using the methods from [19] to construct QAE oracles which compute products and linear combinations of functions.

Firstly, note that the  $\mathcal{A}$  operator of QAE in Eq. (1) can also be written as

$$\mathcal{A}(\mathbf{x}) |0\rangle_{q+1} = \cos(\theta(\mathbf{x})) |\psi_0\rangle_q |0\rangle + \sin(\theta(\mathbf{x})) |\psi_1\rangle_q |1\rangle, \quad (36)$$

for real  $f(\mathbf{x}) = \sin^2(\theta(\mathbf{x}))$ . Constructing  $\mathcal{Q}_\theta^{\pi S}(\mathbf{x})$  based on  $\mathcal{A}(\mathbf{x})$ , we generate a phase kickback of  $e^{\pm 2\pi i S\theta(\mathbf{x})}$ . An operator  $\tilde{\mathcal{Q}}_\theta^{\pi S}(\mathbf{x})$  based on

$$\tilde{\mathcal{A}}_\theta(\mathbf{x}) |0\rangle_{m+n} = \cos(\theta(\mathbf{x}) - \theta(-\mathbf{x})) |\psi_0\rangle_m |0\rangle_n + \sin(\theta(\mathbf{x}) - \theta(-\mathbf{x})) |\psi_1\rangle_m |1\rangle_n, \quad (37)$$

for some appropriate choices of  $m, n$  could therefore be used to generate the phase kickback of  $e^{\pm 2\pi i S(\theta(\mathbf{x}) - \theta(-\mathbf{x}))}$ , and can hence serve as the phase oracle of Eq. (33) we want to construct.

In derivative pricing settings, we can construct a more general variant of Eq. (1)

$$\mathcal{A}(\mathbf{x}, c) |0\rangle_{q+1} = \sqrt{1 - cf(\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{cf(\mathbf{x})} |\psi_1\rangle_q |1\rangle, \quad (38)$$

with  $c \in \mathbb{R}$ , by scaling the payoff of the derivative with  $c$ , as long as  $cf(\mathbf{x}) \leq 1$ . The gradient estimation method in this section requires first the computation of  $f(\mathbf{x}_0)$  (through  $\theta(\mathbf{x}_0)$ ) in order to use the chain rule in Eq. (32), therefore if  $f(\mathbf{x}_0) > 0.25$  we normalize  $\mathcal{A}(\mathbf{x})$  so that we have  $f(\pm\mathbf{x}) \leq 0.25$ . We start with the state  $|0\rangle_{2q+2} \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$  and control on the last qubit to perform  $\mathcal{A}(\mathbf{x}, 4) \otimes \mathcal{A}(-\mathbf{x}, 1)$  if the qubit is  $|0\rangle$  and  $\mathcal{A}(\mathbf{x}, 1) \otimes \mathcal{A}(-\mathbf{x}, 4)$  otherwise. The first  $\mathcal{A}$  operator acts on the qubits  $[1, 2, \dots, q, q+1]$  and the second on qubits  $[q+2, q+3, \dots, 2q+2]$ . The resulting state is

$$\frac{1}{\sqrt{2}} \left( \left( \sqrt{1 - 4f(\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{4f(\mathbf{x})} |\psi_1\rangle_q |1\rangle \right) \otimes \left( \sqrt{1 - f(-\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{f(-\mathbf{x})} |\psi_1\rangle_q |1\rangle \right) \right) |0\rangle \quad (39)$$

$$+ \frac{1}{\sqrt{2}} \left( \left( \sqrt{1 - f(\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{f(\mathbf{x})} |\psi_1\rangle_q |1\rangle \right) \otimes \left( \sqrt{1 - 4f(-\mathbf{x})} |\psi_0\rangle_q |0\rangle + \sqrt{4f(-\mathbf{x})} |\psi_1\rangle_q |1\rangle \right) \right) |1\rangle. \quad (40)$$

The combined state of the first and last two qubits when the first two of them are in state  $|11\rangle$  is

$$\frac{1}{\sqrt{2}} \left( \sqrt{4f(\mathbf{x})} \sqrt{1 - f(-\mathbf{x})} |11\rangle |0\rangle + \sqrt{1 - f(\mathbf{x})} \sqrt{4f(-\mathbf{x})} |11\rangle |1\rangle \right). \quad (41)$$

Applying a Hadamard on the last qubit, the amplitude of these three qubits being in state  $|111\rangle$  is

$$\frac{1}{2} \left( \sqrt{4f(\mathbf{x})} \sqrt{1 - f(-\mathbf{x})} - \sqrt{1 - f(\mathbf{x})} \sqrt{4f(-\mathbf{x})} \right) = \sqrt{f(\mathbf{x})} \sqrt{1 - f(-\mathbf{x})} - \sqrt{1 - f(\mathbf{x})} \sqrt{f(-\mathbf{x})} = \sin(\theta(\mathbf{x}) - \theta(-\mathbf{x})), \quad (42)$$

where we have used  $\sin(a - b) = \sin a \cos b - \cos a \sin b$ ,  $\sin(\theta(\mathbf{x})) = \sqrt{f(\mathbf{x})}$  and  $\cos(\theta(\mathbf{x})) = \sqrt{1 - f(\mathbf{x})}$ . We have now constructed the desired operator of Eq. (37), where the  $|111\rangle$  state marks the "good" state for QAE. A circuit diagram of this method to construct the  $\tilde{\mathcal{A}}_\theta(\mathbf{x})$  operator is shown in Fig. 3.

Now that we have a method to construct the operator of Eq. (33), we use it to numerically simulate the SFQG algorithm to compute the greeks of the basket option of Sec. IV A 2. In this case we use the algorithm to compute the gradients  $\partial\theta/\partial S_1$ ,  $\partial\theta/\partial S_2$ ,  $\partial\theta/\partial S_3$ ,  $\partial\theta/\partial\sigma_1$ , where  $\theta = \sin^{-1} \sqrt{V}$ , and  $V$  is the option price, from which we can then estimate the option's greeks using Eq. (32), assuming we have already priced the contract. Similarly to the simulation of the GAW algorithm in Sec. IV A 2, we search for the parameter values which estimate the gradients within  $\epsilon \leq 0.0625$  with probability of success  $\geq 85\%$ . The probability distribution for all four gradients after the application of the SFQG algorithm is shown in Fig. 4, and the parameter values and query complexity of the algorithm is shown in Table IV along with all the other quantum, classical and semi-classical methods studied in this manuscript. We notice that the SFQG method is the best performing for this option contract, with oracle complexity  $\sim 4x$  and  $\sim 25x$  smaller than semi-classical methods and Hamiltonian-based GAW respectively.

## VI. QUANTUM GRADIENT ESTIMATION USING MAXIMUM LIKELIHOOD ESTIMATION

The success of the quantum gradient estimation algorithms studied so far in this manuscript, as well as those in [8, 9] is judged by their ability to estimate the gradient within  $\epsilon$  with high probability. In [8] the authors suggest

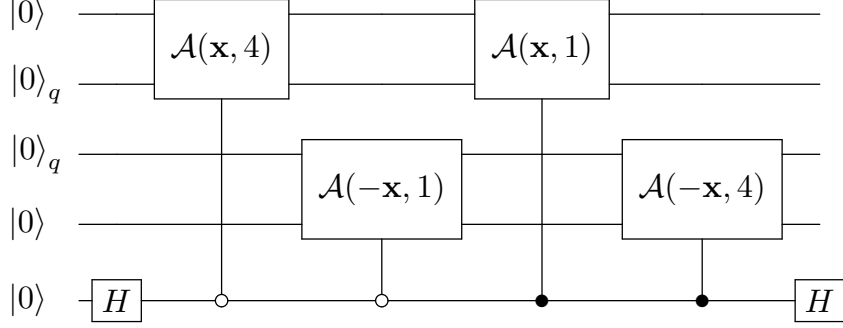


FIG. 3. Circuit diagram of the method used to generate the  $\tilde{A}_\theta(\mathbf{x})$  operator of Eq. (37). An open circle in controlled operations denotes that the unitary is performed if the state of the control qubit is  $|0\rangle$  and a unitary controlled on a qubit with a filled circle takes place if the control qubit is  $|1\rangle$ . Note that we can combine the two invocations of  $\mathcal{A}(\mathbf{x}, c)$  by first encoding the value of  $c$  in an ancilla register, controlled on the last qubit, and then compute  $\mathcal{A}(\mathbf{x}, c)$  once in superposition, controlled on the ancilla register. The same applies to the two invocations of  $\mathcal{A}(-\mathbf{x}, c)$ .

		$N_o$	$m$	$l$
Quantum	Simulation-Free (SFQG)	64	1	0.25
	Semi-classical (SQG)	256	n/a	n/a
	GAW (Numerical)	1600	1	0.25
	GAW (Theoretical)	201,528	4	0.0018
Classical	Finite-Difference w/ CRN (CFD-CRN)	32,000	n/a	n/a
	Finite-Difference (CFD)	400,000	n/a	n/a

TABLE IV. Comparison between (a) the numerical estimates of the query complexity  $N_o$  (Eq. (24)) and parameter values  $(m, l)$  required by the GAW gradient estimation algorithm in order to estimate  $k$  greeks for the basket option of Eq. (28) within  $\epsilon \leq 0.0625$  with probability  $\geq 85\%$ , (b) the corresponding theoretical values used in the proof of Theorem 1, (c) the parameters and resources required for the same calculation using the Simulation-Free Quantum Gradient (SFQG) algorithm described in Sec. V, (d) the query complexity of an SQG method for the same target accuracy and confidence interval and (e) the total number of classical Monte Carlo paths required for the same accuracy and confidence interval using CFD and CFD-CRN methods. We numerically find that for this path-dependent basket option, the  $m = 1$  GAW method can estimate the four greeks within  $\epsilon$  with probability  $\geq 85\%$ , with  $\sim 125$  times smaller query complexity implied by the proof of Theorem 1 and 20 times smaller than the best finite-difference-based classical method (CFD-CRN). The SFQG method far outperforms the query complexity of all other gradient methods studied here.

repeating the gradient estimation algorithm  $\mathcal{O}(\log(k/\rho))$  times for  $k$  gradients and taking the median to get the estimates within error  $\epsilon$  with probability at least  $(1 - \rho)$ . However, this approach has two main drawbacks: a) In practice we would like to be able to characterize the correctness of the output with precise confidence intervals, and b) the output can only be one of the  $N$  possible values of the discretized hypercube  $G_{\mathbf{x}_0}^k$  of Eq. (16).

Recently, approaches using Maximum Likelihood Estimation (MLE) have been proposed to address these issues for amplitude estimation algorithms [20–22], where the quantum circuits are sampled more than once, and the results are classically post-processed with MLE. In this section we show that we can apply the MLE method from [22] to the quantum gradient estimation algorithms to enhance the final estimate.

Given a probability distribution  $p$  with unknown parameter  $g$  and data  $x_i$  with  $i = 1, \dots, M$  sampled from it, MLE is used to obtain an estimate  $\hat{g}$  for  $g$ . This is done by maximizing the log-likelihood  $\log L$

$$\hat{g} = \arg \max_{g'} \log L(g') = \arg \max_{g'} \log \left( \prod_{i=1}^M p(x_i | g') \right) = \arg \max_{g'} \left( \sum_{i=1}^M \log p(x_i | g') \right), \quad (43)$$

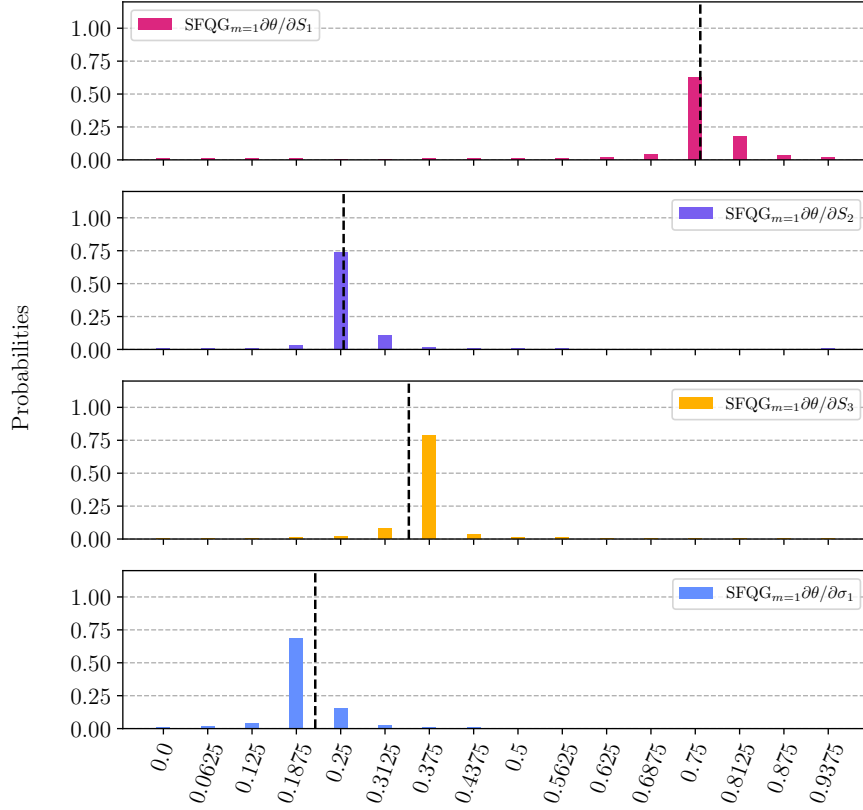


FIG. 4. The probability distribution resulting from the numerical simulation of the second-order accurate, Simulation-Free Quantum Gradient (SFQG) algorithm described in Sec. V with  $m = 1$  and  $l = 0.25$  for the four greeks of the path-dependent basket option of Sec. IV A 2, along with the exact values estimated using classical Monte Carlo simulation (vertical dashed lines). This algorithm allows us to estimate the gradients of the function  $\theta = \sin^{-1} \sqrt{V}$ , where  $V$  is the option price, from which we can then estimate the option's greeks using Eq. (32). Similarly to Fig. 2, measurement gives us estimates for each greek within error  $\epsilon \leq 0.0625$  with probability  $\geq 85\%$ .

which measures how likely it is to measure the data  $x_i$  if  $g'$  is the true parameter. The general quantum gradient estimation algorithm from Sec. II E requires a region  $l$  where the function whose gradients we are computing is approximately linear. In this case, the probability distribution after the inverse Quantum Fourier Transform is applied to Eq. (16) is the same as that of phase estimation and is given by [11]

$$p(x) = \frac{\sin^2(N\Delta\pi)}{N^2 \sin^2(\Delta\pi)}, \quad (44)$$

where  $\Delta = (x - g')$  and  $N$  is the number of possible measurements.

Confidence intervals for the MLE estimate  $\hat{g}$  can be derived using the likelihood ratio (LR) [23]. Following the analysis in the supplementary information of [22], the confidence interval at the  $(1 - \alpha)$  confidence level is the value  $g'$  satisfying  $\left\{g' \in [0, 1] : \log L(g') \geq \log L(\hat{g}) - q_{\chi^2_1}(1 - \alpha)/2\right\}$ , where  $q_{\chi^2_1}$  denotes the  $(1 - \alpha)$  quantile of the  $\chi^2$  distribution.

In Fig. 5 we show how MLE can be used to improve the estimate of Vega ( $\partial\theta/\partial\sigma$ ) for the basket option from Fig. 4 calculated with the simulation-free quantum gradient method. First, in Fig. 5a we show that the final probability distribution after the application of the quantum gradient estimation algorithm does indeed fit Eq. (44), and thus the QAE with MLE results from [22] can be used here too. For clarity, we only plot the measurement outcomes in the interval which contains most of the probability mass. In Fig. 5b we plot the log-likelihood  $\log L(g')$  as a function of  $g'$  across the same interval when we sample the quantum gradient circuit that produces the probability distribution in Fig. 5a 30 times. The MLE estimate  $\hat{g}$  is the global maximum of the function (green dot), which is very close to the true value  $g$  (dashed red line) and significantly better than the median of the final probability distribution (yellow arrow).

We note that one significant advantage of the MLE method is that because the final estimate is not constrained to be one of the  $N$  possible discrete values, we can decrease the value of  $N$  at the cost of increasing the number of samples we take, thus lowering the overall width and depth of the quantum circuit. For instance, while the distance between the  $N$  possible discrete values in Fig. 5a is 0.0625, the error  $\epsilon$  in the MLE estimate in Fig. 5b is  $\epsilon = 4 \times 10^{-3}$ .

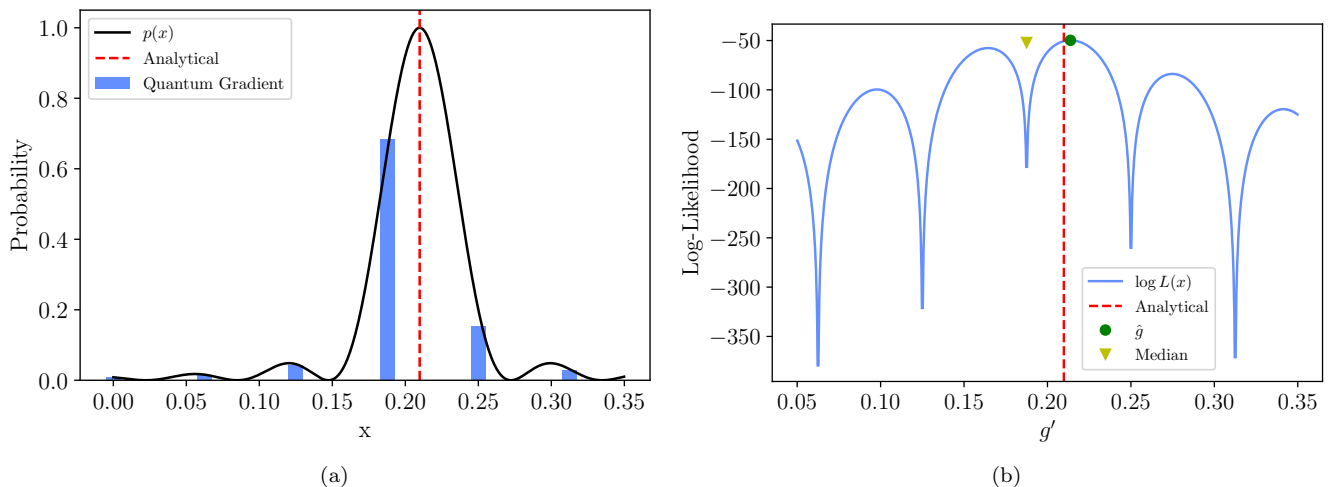


FIG. 5. a) The discrete probability distribution before measurement of Vega ( $\partial\theta/\partial\sigma$ ) for the basket option from Fig. 4 (blue bars) is fitted to the theoretical distribution  $p(x)$  of Eq.(44) (black line). The maximum of the distribution occurs at the exact analytical value (dashed red line). b) The global maximum of the log-likelihood  $\log L(g')$  (green dot) gives us a better estimate of the true value (dashed red line) than the most likely result if we sample from the probability distribution and take the median (yellow triangle). The log-likelihood plot was produced by sampling the quantum gradient estimation circuit 30 times and allows us to estimate this greek to within  $\epsilon \leq 2 \times 10^{-3}$  with confidence level  $1 - \alpha = 0.68$ .

## VII. UPDATED ESTIMATES FOR QUANTUM ADVANTAGE

The resource estimation of Chakrabarti et al. [5] established that quantum advantage for derivative pricing with respect to classical Monte Carlo methods could require a quantum processor that can execute  $\mathcal{O}(10^7)$  T-gates per second at a code distance that can support  $\mathcal{O}(10^{10})$  logical operations. More specifically, pricing the autocallable contract studied in Ref. [5] using the reparameterization technique introduced therein to within  $\epsilon \leq 2 \times 10^{-3}$  with confidence level  $1 - \alpha = 0.68$  requires a T-depth of  $5 \times 10^7$ . As such, in order to match the classical Monte Carlo pricing time estimated as 1 second, a logical quantum clock rate of 50Mhz would be needed. We use the same reparameterization technique from Ref. [5] to construct oracle size estimates, and estimate the T-depth of the SFQG quantum gradient circuit required to compute the four greeks of the basket option of Sec. IV A 2 and Table IV. We find that in order to calculate the greeks to within the same  $\epsilon \leq 2 \times 10^{-3}$  and confidence level  $1 - \alpha = 0.68$ , we can use the SFQG gradient estimation method with the parameters of Fig. 4 and the maximum likelihood estimation (MLE) method from Sec. VI using 30 shots (see Fig. 5b). Using these parameters, we estimate that the total T-depth of the SFQG circuit multiplied by the required number of shots is  $9 \times 10^6$ , the end-to-end circuit would require 6k logical qubits, and we would need to execute T-gates at a code distance that can support  $10^8$  logical operations. Assuming the contract can be classically priced using Monte Carlo in 1 second to within the same error and confidence level [5] and that the greeks can be calculated using a second-order finite-difference method applied to Monte Carlo pricings, the greeks of the basket option can be classically estimated in 8 seconds (four greeks, two pricings per greek). Therefore, quantum advantage in calculating the greeks of this derivative contract would require executing T-gates at a rate of 1Mhz, 50 times lower than the estimate of Chakrabarti et al. for quantum advantage in derivative pricing. Moreover, because the quantum gradient circuit is sampled 30 times when we use the MLE method (see Fig. 5), if we have parallel access to 30 QPUs on which the quantum circuit can be loaded and sampled simultaneously, we can achieve the same runtime as the serial execution if the logical clock rate of each device is  $\sim 30\text{kHz}$ , on par with current estimates of feasible logical clock rates around 10kHz [24].

While the computational cost required for the numerical simulations of the quantum gradient estimation algorithm limits our analysis to a maximum of  $k = 4$  greeks for practically relevant use cases, we expect that the algorithm can scale favorably to derivative pricing problems of higher dimensionality, motivated by the fact that most, if not



all, derivative contracts of practical interest have piecewise-linear payoffs [7]. While Theorem 1 provides a complexity of  $\mathcal{O}(\sqrt{k}/\epsilon)$  for the class of functions considered, it does not preclude higher-order speedups with respect to  $k$  for smoother functions. For instance, the same gradient estimation algorithm applied to simple polynomial functions can achieve a complexity of  $\mathcal{O}(\log(k)/\epsilon)$  [8]. Derivative contracts often include market parameters with little or no cross-dependence, i.e.  $\partial^n f / (\partial x_1^m \partial x_2^{n-m}) \sim 0$  for  $n > 1, m \in [1, n-1]$ . For example, the basket option from Sec. IV A 2 without the knock-in feature satisfies  $\partial^n V / (\partial S_i^n \partial S_j^{n-m}) = 0$ . The absence of such higher-order terms allows us to pick values of  $m$  and  $l$  in the application of the GAW algorithm which lead to smaller overall oracular cost than what is required by Theorem 1. An upper bound on the potential advantage compared to classical Monte Carlo is the case where the function is at most a second-degree polynomial in all  $k$  variables, yielding an overall speedup of  $\mathcal{O}(k)$ . Therefore, while we have made a first step in establishing the relevance and promise of the quantum gradient estimation methods in the context of financial derivative risk analysis, the possible extent of quantum speedup will be highly dependent on the nature of the price function for each derivative.

## VIII. DISCUSSION

We introduce a method to compute gradients of financial derivatives (greeks) using the gradient algorithms from [8, 9]. This method suggests additional quantum advantage is possible in risk analysis, on top of the quadratic speedup of derivative pricing [1, 4, 5]. Classically computing  $k$  greeks with finite-difference methods - when the underlying derivative is priced using Monte Carlo - has complexity  $\mathcal{O}(k/\epsilon^2)$  and straightforward extension of finite-difference methods to derivative pricing using amplitude estimation provides a quadratic advantage with complexity  $\mathcal{O}(k/\epsilon)$ . In this work, we explore an additional quadratic advantage for overall complexity of  $\mathcal{O}(\sqrt{k}/\epsilon)$ . The gradient estimation algorithm from [8] guarantees this quadratic advantage with respect to the number of greeks when the pricing function satisfies the smoothness conditions of Theorem 1. Because derivative pricing problems of practical interest in finance involve numerous diverse multivariate price functions and generally have no analytical solutions, understanding whether and which financial derivatives satisfy the aforementioned smoothness conditions is a challenging task. For this reason, we employ numerical methods to simulate the gradient estimation algorithm for two example derivatives: a) a European call option which has a closed-form solution and is used to establish the validity and benchmarks of the algorithm and b) a path-dependent basket option which has no known analytical solution and is representative of typical derivative price functions. We find that the quantum gradient algorithms not only succeed in estimating the associated greeks for these examples with high probability, but that the resulting query complexity is in fact significantly smaller than that suggested by Theorem 1 (Tables III and IV), suggesting that the associated price functions are smoother than those studied in Theorem 1.

Another question we tackle in this work is the rigorous resource estimation of the quantum oracles involved in the quantum gradient estimation algorithm. Due to the extra cost associated with the block-encoding and Hamiltonian simulation required to approximately construct the phase oracle of Eq. (15) from the probability oracle of Eq. (1) used in derivative pricing, in Sec. VB we develop a method to construct a cheaper, second-order ( $m = 1$ ) phase oracle exactly by taking advantage of the structure of amplitude estimation. An interesting question is whether this method can be extended to construct phase oracles for higher-order ( $m > 1$ ) gradient methods which would apply more generally to quantum gradient estimation problems.

In Sec. VI we show that it is possible to enhance quantum gradient algorithms by employing maximum likelihood estimation (MLE), allowing us to determine the resources required to estimate gradients with precise confidence intervals and confidence levels. Using this MLE method, in Sec. VII we estimate the resources required for quantum advantage in derivative market risk for typical use cases of practical interest. We find that employing quantum gradient methods in derivative pricing lowers the logical clock rate estimate for quantum advantage from Chakrabarti et al. [5] by a factor of 50.

While finite-difference methods are still used in practice to compute greeks, more recently classical automatic differentiation (AD) methods have been gathering considerable interest because of their ability to significantly reduce the associated computational costs, at the cost of increased memory footprint [25, 26]. In particular, the adjoint mode of automatic differentiation (AAD) in certain cases allows the computation of all  $k$  gradients of a scalar function  $f$  at a cost which is independent of  $k$ , meaning that the overall classical complexity cost in this case becomes  $\mathcal{O}(\omega/\epsilon^2)$ , for some constant  $\omega$  depending on the function  $f$  [27]. While the complexity of the GAW quantum gradient estimation algorithm scales as  $\mathcal{O}(\sqrt{k}/\epsilon)$  for the class of smooth functions in Theorem 1, in Sec. IV A we saw that for practical use cases in finance, the algorithm scales 100x-200x times better than theoretical estimate from Theorem 1 for a given  $\epsilon$  (Tables III and IV). As such, depending on the practical scaling of the GAW algorithm to larger values of  $k$  for finance use cases, it is possible that it could also outperform the complexity of AAD methods. It is also interesting to consider whether a similar construct as that employed by AD can be applied in a quantum setting. In Appendix A we provide such a construct and show that in certain settings it can lead to similar performance profile as classical

AD, in that the runtime of the algorithm is independent of the number of greeks at the expense of increased memory usage. A detailed comparison of the performance between the quantum gradient algorithms and AD methods is a worthy study on its own and it is left for future research.

Intuitively, the expensive part of quantum derivative pricing is extracting the result through quantum amplitude estimation. Therefore it is advantageous to perform additional calculations involving that value before reading it out. In this work we consider calculating gradients, but there are other associated risk metrics that are equally of practical interest, such as the computation of portfolio value-at-risk (VaR). Based on our results, we are therefore cautiously optimistic that further quantum advantage in the derivative pricing subroutine can be leveraged at these higher levels of calculation and aggregation, and suggests an additional research path going forward.

## ACKNOWLEDGMENTS

We thank Rajiv Krishnakumar, Shouvanik Chakrabarti and Srinivasan Arunachalam for useful discussions regarding quantum gradient estimation algorithms, and Paul Burchard, Graham Griffiths, Alex Hurst, Dunstan Marris and Elmer Tan for their technical and business insights regarding financial derivatives and market risk.

- 
- [1] Patrick Rebentrost, Brajesh Gupta, and Thomas R. Bromley, “Quantum computational finance: Monte carlo pricing of financial derivatives,” *Phys. Rev. A* **98**, 022321 (2018).
  - [2] Stefan Woerner and Daniel J. Egger, “Quantum risk analysis,” *npj Quantum Information* **5** (2019), 10.1038/s41534-019-0130-6.
  - [3] Daniel J Egger, Ricardo Garcia Gutierrez, Jordie Cahue Mestre, and Stefan Woerner, “Credit risk analysis using quantum computers,” *IEEE Transactions on Computers* (2020), 10.1109/TC.2020.3038063.
  - [4] Nikitas Stamatopoulos, Daniel J. Egger, Yue Sun, Christa Zoufal, Raban Iten, Ning Shen, and Stefan Woerner, “Option pricing using quantum computers,” *Quantum* **4**, 291 (2020).
  - [5] Shouvanik Chakrabarti, Rajiv Krishnakumar, Guglielmo Mazzola, Nikitas Stamatopoulos, Stefan Woerner, and William J. Zeng, “A threshold for quantum advantage in derivative pricing,” *Quantum* **5**, 463 (2021).
  - [6] Ashley Montanaro, “Quantum speedup of monte carlo methods,” *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* **471** (2015), 10.1098/rspa.2015.0301.
  - [7] John C. Hull, *Options, futures, and other derivatives*, 6th ed. (Pearson Prentice Hall, Upper Saddle River, NJ [u.a.], 2006).
  - [8] András Gilyén, Srinivasan Arunachalam, and Nathan Wiebe, “Optimizing quantum optimization algorithms via faster quantum gradient computation,” *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms*, 1425–1444 (2019).
  - [9] Stephen P. Jordan, “Fast quantum algorithm for numerical gradient estimation,” *Physical Review Letters* **95** (2005), 10.1103/physrevlett.95.050501.
  - [10] Shouvanik Chakrabarti, Andrew M. Childs, Tongyang Li, and Xiaodi Wu, “Quantum algorithms and lower bounds for convex optimization,” *Quantum* **4**, 221 (2020).
  - [11] Gilles Brassard, Peter Hoyer, Michele Mosca, and Alain Tapp, “Quantum Amplitude Amplification and Estimation,” *Contemporary Mathematics* **305** (2002), 10.1090/conm/305/05215.
  - [12] P. Glasserman and D. Yao, “Some guidelines and guarantees for common random numbers,” *Management Science* **38**, 884–908 (1992).
  - [13] B. Fornberg, “Generation of finite difference formulas on arbitrarily spaced grids,” *Mathematics of Computation* **51**, 699–706 (1988).
  - [14] Maurice Gevrey, “Sur la nature analytique des solutions des équations aux dérivées partielles. premier mémoire,” *Annales scientifiques de l’École Normale Supérieure* **3e série**, **35**, 129–190 (1918).
  - [15] Guang Hao Low and Isaac L Chuang, “Hamiltonian simulation by qubitization,” *Quantum* **3**, 163 (2019).
  - [16] András Gilyén, Yuan Su, Guang Hao Low, and Nathan Wiebe, “Quantum singular value transformation and beyond: exponential improvements for quantum matrix arithmetics,” in *Proceedings of the 51st Annual ACM SIGACT Symposium on Theory of Computing* (2019) pp. 193–204.
  - [17] John M Martyn, Yuan Liu, Zachary E Chin, and Isaac L Chuang, “Efficient fully-coherent hamiltonian simulation,” (2021), arXiv:2110.11327 [quant-ph].
  - [18] Fischer Black and Myron Scholes, “The pricing of options and corporate liabilities,” *Journal of Political Economy* **81**, 637–654 (1973).
  - [19] Almudena Carrera Vazquez and Stefan Woerner, “Efficient state preparation for quantum amplitude estimation,” *Physical Review Applied* **15** (2021), 10.1103/physrevapplied.15.034027.
  - [20] Yohichi Suzuki, Shumpei Uno, Rudy Raymond, Tomoki Tanaka, Tamiya Onodera, and Naoki Yamamoto, “Amplitude estimation without phase estimation,” *Quantum Information Processing* **19**, 75 (2020).
  - [21] Tomoki Tanaka, Yohichi Suzuki, Shumpei Uno, Rudy Raymond, Tamiya Onodera, and Naoki Yamamoto, “Amplitude estimation via maximum likelihood on noisy quantum computer,” *Quantum Information Processing* **20**, 293 (2021).

- [22] Dmitry Grinko, Julien Gacon, Christa Zoufal, and Stefan Woerner, “Iterative quantum amplitude estimation,” *npj Quantum Information* **7** (2021), 10.1038/s41534-021-00379-1.
- [23] Karl-Rudolf Koch, *Parameter Estimation and Hypothesis Testing in Linear Models* (Springer-Verlag Berlin Heidelberg, 1999).
- [24] Austin G. Fowler and Craig Gidney, “Low overhead quantum computation using lattice surgery,” (2019), [arXiv:1808.06709](https://arxiv.org/abs/1808.06709) [quant-ph].
- [25] Cristian Homescu, “Adjoint and automatic (algorithmic) differentiation in computational finance,” *Risk Management eJournal* (2011), 10.2139/ssrn.1828503.
- [26] Gilles Pages, Olivier Pironneau, and Guillaume Sall, “Vibrato and automatic differentiation for high order derivatives and sensitivities of financial options,” *Journal of Computational Finance* **22** (2016), 10.21314/JCF.2018.350.
- [27] Luca Capriotti, “Fast greeks by algorithmic differentiation,” *J. Comput. Financ.* **14** (2010), 10.2139/ssrn.1619626.
- [28] L. Capriotti and M. Giles, “Fast correlation greeks by adjoint algorithmic differentiation,” *ERN: Simulation Methods (Topic)* (2010), 10.2139/ssrn.1587822.
- [29] Charles H. Bennett, “Logical reversibility of computation,” *IBM Journal of Research and Development* **17** (1973), 10.1147/rd.176.0525.

### Appendix A: Automatic Differentiation and Multi-Objective QAE

Another way to compute gradients in the considered setting is automatic differentiation (AD) [25–27]. AD repeatedly applies the chain rule to every elementary arithmetic operation that is used to compute an objective function and keeps track of the analytical gradient throughout the calculation. Different variants of AD exist [25] and it has been shown that in many practical applications the gradient can be computed at only a constant overhead, independent of the dimension [27]. In some cases the overhead can even be stated to be bounded by a factor of four compared to evaluating the function alone at the expense of larger memory requirements [28].

Suppose now we want to estimate an expectation value  $\mathbb{E}(g(S, x))$  for a payoff function  $g$ , a random variable  $S$  and some given parameters  $x$  as well as the corresponding gradient  $\nabla_x \mathbb{E}(g(S, x))$ . To construct the probability oracle  $\mathcal{A}(x)$  required by QAE for a fixed  $x$ , we usually first create a weighted superposition of all scenarios, then evaluate the corresponding payoff for each scenario, and last prepare an objective qubit, i.e., we get

$$\sum_{j=0}^{2^m-1} \sqrt{p_j} |s_j\rangle |g(s_j, x)\rangle \left( \sqrt{1 - g(s_j, x)} |0\rangle + \sqrt{g(s_j, x)} |1\rangle \right), \quad (\text{A1})$$

such that the probability of measuring  $|1\rangle$  in the last qubit corresponds to  $\mathbb{E}(g(S, x))$ , and where the  $s_j$  denote the possible realizations of  $S$  represented by  $m$  qubits and the  $p_j$  denote the corresponding probabilities.

For every scenario  $|s_j\rangle$ , we apply quantum arithmetic to compute the payoff  $|g(s_j, x)\rangle$ . Thus, for each  $s_j$ , we can also use AD in the same way as classically to compute the gradient  $\nabla_x g(s_j, x)$ , while using at most twice the resources required classically due to the need of a reversible implementation [29]. Thus, with a constant overhead compared to the evaluation of the expectation value, this results in the state

$$\sum_{j=0}^{2^m-1} \sqrt{p_j} |s_j\rangle |g(s_j, x)\rangle \bigotimes_{i=1}^k |\partial_i g(s_j, x)\rangle. \quad (\text{A2})$$

In the following, we show how to use QAE to read out multiple objectives defined on the same random variables, which then immediately applies to the gradient as constructed in Eq. (A2).

Suppose a random variable  $S$  and a set of functions  $f_i$ ,  $i = 1, \dots, k$ , that map realizations of  $S$  to  $\mathbb{R}$ . Further, suppose we are interested in estimating the expectation values  $\mathbb{E}(f_i(S))$  for all  $i$ , and that we can construct a state of the form

$$\sum_{j=0}^{2^m-1} \sqrt{p_j} |s_j\rangle \bigotimes_{i=1}^k |f_i(s_j)\rangle. \quad (\text{A3})$$

Then, to estimate the values  $\mathbb{E}(f_i(S))$ , we first introduce  $k$  additional  $m$ -qubit registers  $|c_i\rangle$ , each initialized with some value  $c_i$ , and second, we use quantum arithmetic to compute the sum

$$\sum_{i=1}^k c_i f_i(s_j) \quad (\text{A4})$$

into another register. In other words, we construct an operator that acts as

$$\bigotimes_{i=1}^k |c_i\rangle |0\rangle \bigotimes_{i=1}^k |0\rangle |0\rangle \mapsto \bigotimes_{i=1}^k |c_i\rangle \sum_{j=0}^{2^m-1} \sqrt{p_j} |s_j\rangle \bigotimes_{i=1}^k |f_i(s_j)\rangle \left| \sum_{i=1}^k c_i f_i(s_j) \right\rangle. \quad (\text{A5})$$

By adding an objective qubit and applying a rotation controlled by the last register we can also use this to construct a probability oracle  $\mathcal{A}(c)$  that corresponds to the function

$$f(c) = \mathbb{E} \left( \sum_{i=1}^k c_i f_i(S) \right). \quad (\text{A6})$$

This is a linear function in  $c$  and using the quantum gradient algorithm with respect to  $c$  results in

$$\nabla_c f(c) = (\mathbb{E}(f_1(S)), \dots, \mathbb{E}(f_k(S)))^T, \quad (\text{A7})$$

i.e., in the read out of all  $k$  expectation values.

If the values of  $f_i$  are such that the weighted sum in Eq. (A4) satisfies  $\sum_{i=1}^k c_i f_i(s_j) \leq 1$ , since the function by construction is linear in  $c$ , the resulting complexity of the quantum gradient algorithm for a target accuracy  $\epsilon > 0$  scales as  $\tilde{\mathcal{O}}(1/\epsilon)$ , i.e., independent of  $k$  (ignoring logarithmic terms), following [8, Thm. 23, arxiv version]. The multi-objective QAE requires  $k \cdot m$  additional qubits as well as the weighted sum in Eq. (A4), which can be computed in logarithmic depth by using a divide-and-conquer summation scheme. If on the other hand, Eq. (A4) needs to be normalized by dividing the weighted sum with a factor  $D$ , the complexity of the algorithm becomes  $\tilde{\mathcal{O}}(1/\epsilon D)$ . When  $f_i \sim 1, \forall i$ , we would need to choose  $D \sim 1/k$ , which adds a factor of  $k$  back to the complexity of the algorithm, negating the advantage of this method.

Since Eq. (A2) has the required shape, we can immediately apply the multi-objective QAE to evaluate the gradient that has been evaluated using AD implemented by quantum arithmetic. If no additional normalization is required, we can combine AD and (multi-objective) QAE to get the gradient algorithm with runtime  $\tilde{\mathcal{O}}(1/\epsilon)$ , i.e., independent of the dimension and with a quadratic speed-up in the accuracy. Thus, like classically, AD could represent a promising approach to estimate market risks with a significant advantage over finite difference schemes. What remains to be analyzed in more depth, is how this affects the required memory, i.e. qubits, and how to best automate automatic differentiation for reversible quantum arithmetic.